


## ABIRM

INNESTO RAPIDO "PUSH-PULL" A VALVOLA  
VALVE QUICK RELEASE "PUSH-PULL" COUPLING  
"PUSH-PULL" SCHNELLKUPPLUNG MIT KEGELVENTIL

Maschio - Male - Stecker




Codice Code Bestell-Nr.	F	P MAX bar	L	CH	kg
ABIRM08000	1/2" BSP	250	44,5	27	0,08
ABIRMN0800	1/2" NPT	250	44,5	27	0,08

## AIPVF

INNESTO RAPIDO "PUSH-PULL" A VALVOLA  
VALVE QUICK RELEASE "PUSH-PULL" COUPLING  
"PUSH-PULL" SCHNELLKUPPLUNG MIT KEGELVENTIL

Femmina - Female - Muffe




Codice Code Bestell-Nr.	F	P MAX bar	L	ØD	CH	kg
AIPVF08000	1/2" BSP	250	63,2	38	27	0,28
AIPVFN0800	1/2" NPT	250	63,2	38	27	0,28

## AIRMS

INNESTO RAPIDO "PUSH-PULL" A SFERA  
BALL QUICK RELEASE "PUSH-PULL" COUPLING  
"PUSH-PULL" SCHNELLKUPPLUNG MIT KUGELVENTIL

Maschio - Male - Stecker




Codice Code Bestell-Nr.	F	P MAX bar	L	CH	kg
AIRMS08000	1/2" BSP	250	44,5	27	0,10
AIRMSN0800	1/2" NPT	250	44,5	27	0,10

## AIPSF

INNESTO RAPIDO "PUSH-PULL" A SFERA  
BALL QUICK RELEASE "PUSH-PULL" COUPLING  
"PUSH-PULL" SCHNELLKUPPLUNG MIT KUGELVENTIL

Femmina - Female - Muffe




Codice Code Bestell-Nr.	F	P MAX bar	L	ØD	CH	kg
AIPSF08000	1/2" BSP	250	63,2	38	27	0,29
AIPSFN0800	1/2" NPT	250	63,2	38	27	0,29

## AIFIRM

INNESTO RAPIDO A FACCIA PIANA  
FLAT FACE QUICK COUPLING  
FLACHDICHTENDE SCHNELLKUPPLUNG

Maschio - Male - Stecker




Codice Code Bestell-Nr.	F BSP	P MAX bar**	L	CH	kg
AIFIRM0400	1/4"	300	47,9	22	0,09
AIFIRM0600	3/8"	300	60,0	24	0,12
AIFIRM0800	1/2"	250	62,5	27	0,13
AIFIRM1200	3/4"	250	70,5	36	0,23
AIFIRM1600	1"	250	82,3	45	0,39
AIFIRM2000	1"1/4	250	89,8	55	0,64

\*\* ACCOPPIATO - COUPLED - GEKUPPELT

## AIFIRF

INNESTO RAPIDO A FACCIA PIANA  
FLAT FACE QUICK COUPLING  
FLACHDICHTENDE SCHNELLKUPPLUNG

Femmina - Female - Muffe




Codice Code Bestell-Nr.	F BSP	P MAX bar**	L	ØD	CH	kg
AIFIRF0400	1/4"	300	48,1	28	22	0,14
AIFIRF0600	3/8"	300	64,2	32	27	0,24
AIFIRF0800	1/2"	250	69,2	32	27	0,24
AIFIRF1200	3/4"	250	80,8	38	36	0,41
AIFIRF1600	1"	250	93,2	48	45	0,77
AIFIRF2000	1"1/4	250	106,0	55	55	1,22

\*\* ACCOPPIATO - COUPLED - GEKUPPELT

**INNESTO RAPIDO A VALVOLA TIPO "MBV"**  
VALVE QUICK COUPLING - "MBV" TYPE  
SCHNELLKUPPLUNG MIT KEGELVENTIL TYP "MBV"

**AIM**

Maschio - Male - Stecker ISO 7241-A




Codice Code Bestell-Nr.	F BSP	P MAX bar	L	CH	kg
AIM8000400	1/4"	350	35	19	0,05
AIM8000600	3/8"	315	39	22	0,06
AIM8000800	1/2"	175	46	27	0,09
AIM8001200	3/4"	250	54	34	0,19

**INNESTO RAPIDO A VALVOLA TIPO "MBV"**  
VALVE QUICK COUPLING - "MBV" TYPE  
SCHNELLKUPPLUNG MIT KEGELVENTIL TYP "MBV"

**AIF**


Femmina - Female - Muffe ISO 7241-A




Codice Code Bestell-Nr.	F BSP	P MAX bar	L	ØD	CH	kg
AIF8000400	1/4"	350	47	25	19	0,08
AIF8000600	3/8"	315	58	31	24	0,15
AIF8000800	1/2"	250	67	38	30	0,27
AIF8001200	3/4"	250	81	46	38	0,47

**GIUNTO GIREVOLE IN LINEA**  
IN LINE ROTARY COUPLING  
REIHENDREHGELENKE

**AGG**

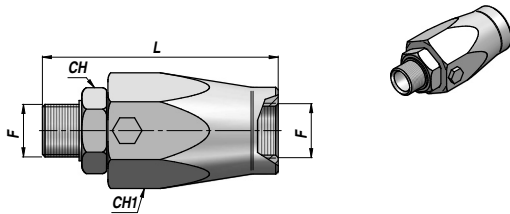

1/4" - 3/8" - 1/2" - 3/4"

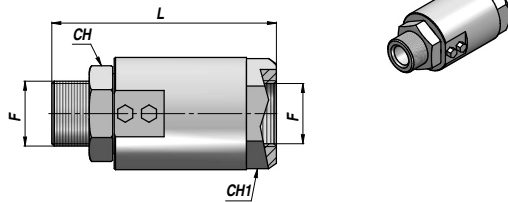


1" - 1 1/4"

Codice Code Bestell-Nr.	F BSP	P MAX bar	L	CH-CH1	kg
AGG0400000	1/4"	200	61	19/30	0,21
AGG0600000	3/8"	200	66	24/34	0,26
AGG0800000	1/2"	150	70	27/36	0,34
AGG1200000	3/4"	150	79	34/45	0,55
AGG1600000	1"	100	90	41/50	0,91
AGG2000000	1 1/4"	100	101	50/55	1,10


P MAX = pressione max in rotazione - max rotation pressure - max. Rotationsdruck

**GIUNTO GIREVOLE A 90°**  
90° ROTARY COUPLING  
90° DREHGELENKE

**AGG90**

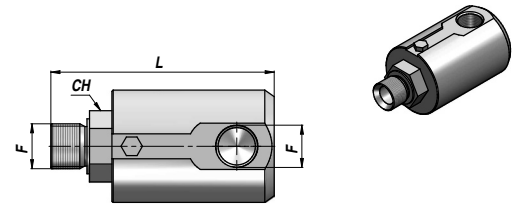

1/4" - 3/8" - 1/2" - 3/4" - 1"

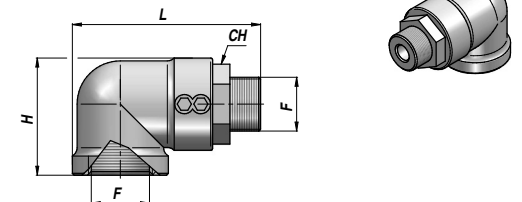

1 1/4"

Codice Code Bestell-Nr.	F BSP	P MAX bar	L	H	CH	kg
AGG9040000	1/4"	200	69	-	19	0,31
AGG9060000	3/8"	200	78	-	24	0,42
AGG9080000	1/2"	150	86	-	27	0,52
AGG9120000	3/4"	150	99	-	34	0,90
AGG9160000	1"	100	113	-	41	1,12
AGG9200000	1 1/4"	100	120	82	50	1,75

P MAX = pressione max in rotazione - max rotation pressure - max. Rotationsdruck