
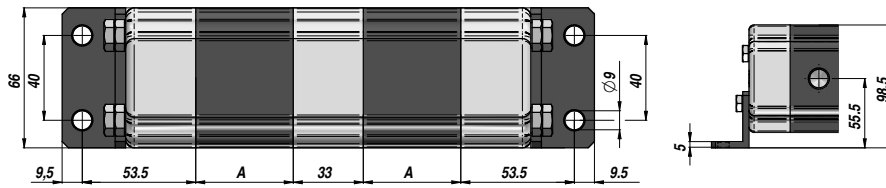




RV1D

DIVISORE DI FLUSSO TIPO STANDARD GEAR FLOW DIVIDER STANDARD TYPE ZAHNRADMENGENTEILER STANDARDTYP





RV1S

DIVISORE DI FLUSSO CON VALVOLA RIFASATRICE SINGOLA GEAR FLOW DIVIDER WITH SINGLE RELIEF VALVE ZAHNRADMENGENTEILER MIT EINZELNEM PHASEAUSGLEICHVENTIL

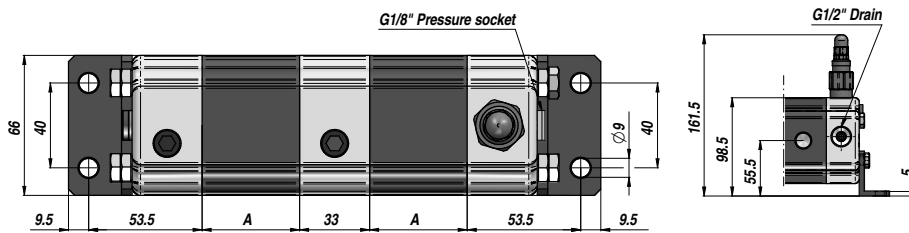

RV1V

DIVISORE DI FLUSSO CON VALVOLA RIFASATRICE IN OGNI ELEMENTO GEAR FLOW DIVIDER WITH RELIEF VALVE ON EACH ELEMENT ZAHNRADMENGENTEILER MIT PHASEAUSGLEICHVENTIL IN JEDEM ELEMENT

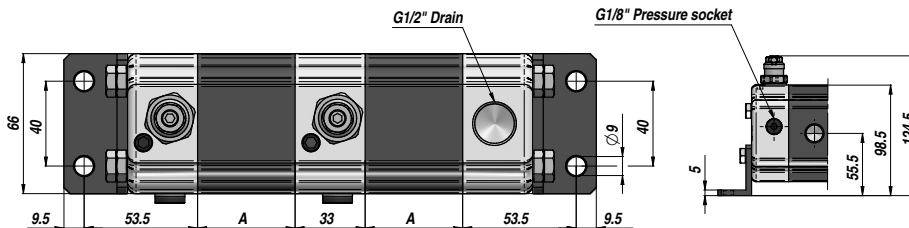



Tipo Type Typ	cm ³ /giro cm ³ /rev cm ³ /U	Q l/min per element			P MAX bar	A	IN BSP	OUT BSP	kg
		Min.	Optimal	Max.					
RV 1 - (D-S-V) 0,9	0,90	1	2	6	220	41,5	1/2"	3/8"	~1,05
RV 1 - (D-S-V) 1,2	1,20	1,5	3	7	220	42,5	1/2"	3/8"	~1,07
RV 1 - (D-S-V) 1,7	1,70	2	4	9	220	44	1/2"	3/8"	~1,11
RV 1 - (D-S-V) 2,2	2,20	2,5	5	13	220	46	1/2"	3/8"	~1,14
RV 1 - (D-S-V) 2,6	2,60	3	6	15,5	220	48	1/2"	3/8"	~1,16
RV 1 - (D-S-V) 3,2	3,20	3,5	7,5	18	220	50	1/2"	3/8"	~1,19
RV 1 - (D-S-V) 3,8	3,80	4	8,5	21	220	52	1/2"	3/8"	~1,22
RV 1 - (D-S-V) 4,3	4,30	4,5	9,5	23	220	54	1/2"	3/8"	~1,27
RV 1 - (D-S-V) 4,9	4,90	5,5	11	27	220	57	1/2"	3/8"	~1,32
RV 1 - (D-S-V) 5,9	5,90	6,5	13	30	220	60,5	1/2"	3/8"	~1,36
RV 1 - (D-S-V) 6,5	6,50	7,5	14	32	220	63	1/2"	3/8"	~1,40
RV 1 - (D-S-V) 7,8	7,80	8,5	16	35,5	210	67	1/2"	3/8"	~1,46
RV 1 - (D-S-V) 9,8	9,80	11	20	41	200	76	1/2"	3/8"	~1,60

I dati della tabella sono riferiti ad un singolo elemento.
The data of the table refer to a single element.
Die Angaben in der Tabelle beziehen sich auf ein einzelnes Element.



DIVISORE DI FLUSSO TIPO STANDARD
GEAR FLOW DIVIDER STANDARD TYPE
ZAHNRADMENGENTEILER STANDARDTYP

RV2D

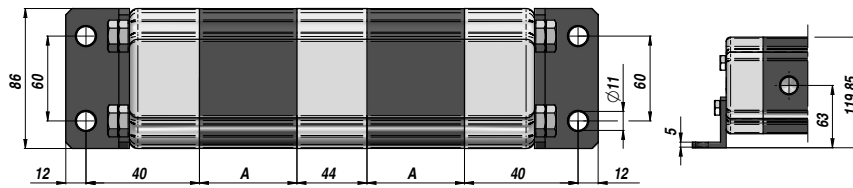

DIVISORE DI FLUSSO CON VALVOLA RIFASATRICE IN OGNI ELEMENTO
GEAR FLOW DIVIDER WITH RELIEF VALVE ON EACH ELEMENT
ZAHNRADMENGENTEILER MIT PHASENAUSGLEICHVENTIL IN JEDEM ELEMENT

RV2V

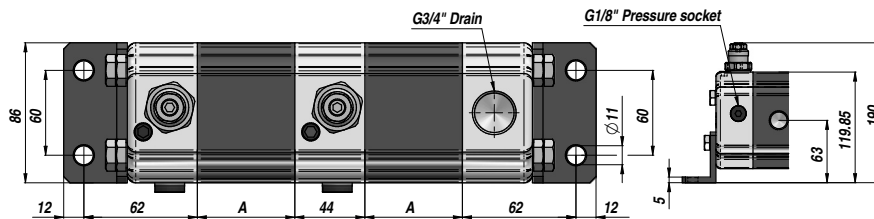

Tipo Type Typ	cm ³ /giro cm ³ /rev cm ³ /U	Q l/min per element			P MAX bar	A	IN BSP	OUT BSP	kg
		Min.	Optimal	Max.					
RV 2 - (D-V) 4	4,0	4,8	7,6	10	210	47	3/4"	1/2"	~2,20
RV 2 - (D-V) 6	6,0	7,2	10,8	15	210	50	3/4"	1/2"	~2,30
RV 2 - (D-V) 9	9,0	10,8	15,1	22,5	210	54	3/4"	1/2"	~2,40
RV 2 - (D-V) 11	11,0	13,2	19,4	27,5	210	58	3/4"	1/2"	~2,50
RV 2 - (D-V) 14	14,0	16,8	25,9	35	200	64	3/4"	1/2"	~2,70
RV 2 - (D-V) 17	17,0	20,4	30,2	42,5	200	68	3/4"	1/2"	~2,80
RV 2 - (D-V) 19	19,0	22,8	34,6	47,5	190	72	3/4"	1/2"	~2,90
RV 2 - (D-V) 22	22,0	26,4	41,0	55	180	78	3/4"	1/2"	~3,05
RV 2 - (D-V) 26	26,0	31,2	45,4	65	160	82	1"	3/4"	~3,15
RV 2 - (D-V) 30	30,0	36,0	54,0	75	160	90	1"	3/4"	~3,40
RV 2 - (D-V) 34	34,0	40,8	61,6	85	140	97	1"	3/4"	~3,60
RV 2 - (D-V) 40	40,0	48,0	71,3	100	130	106	1"	3/4"	~3,80

I dati della tabella sono riferiti ad un singolo elemento.
The data of the table refer to a single element.
Die Angaben in der Tabelle beziehen sich auf ein einzelnes Element.